

AQUA FLO[®]

Better Water For Your Home & Family




Your Water Quality is a Growing Concern

Aging infrastructure and increasing groundwater contamination is a growing reality and concern. The ingestion and inhalation of water disinfection products, such as chlorine, is also undesirable and unnecessary from both an aesthetic and physical standpoint.

Finding The Right Solution

Improving your water quality is easy and economical. While bottled water remains a popular option for drinking water, it is an expensive, less convenient alternative that creates waste and is hard on the environment.

Aqua Flo™ Water Filtration Products provide you with a wide range of solutions for fresh, clean water. Not only do you get great-tasting water for drinking and cooking, you also get clear, odor free water for washing and utility use. No more carrying or storing heavy bottles either!

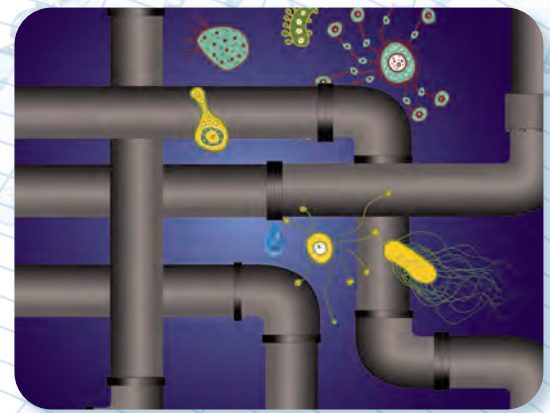


Water travels through miles of pipes before reaching your home. Chlorine is commonly used to kill bacteria along the way. Once at your tap, it is desirable to reduce chlorine.

Aqua Flo Filter Cartridges are available to solve a wide variety of water problems:


- ◆ Remove dirt, silt, clay and other sediments
- ◆ Remove iron to prevent staining
- ◆ Minimize unpleasant odors, including chlorine

Understanding Your Aqua Flo Filtration System

Aqua Flo Filtration Systems consist of a Filter Housing that connects to your plumbing system and disposable Filter Cartridge that performs the work. Depending on your needs, systems can consist of a single or series of Housings installed either under a specific sink (Point-of-Use) or where the water main enters the home (Point-of-Entry). Filter Cartridges are easily replaced periodically, typically on an annual or semi-annual basis, depending on your incoming water quality.

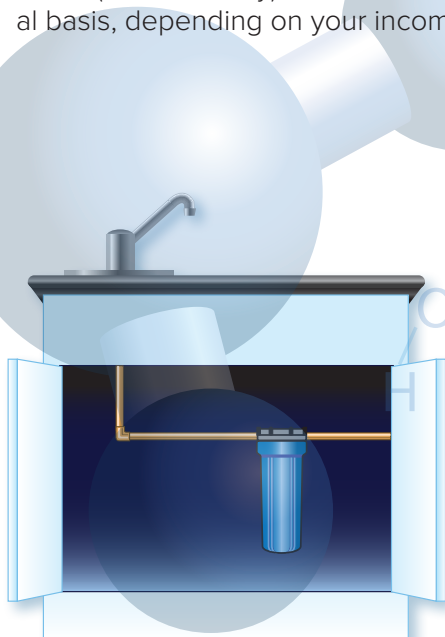

Point of Use

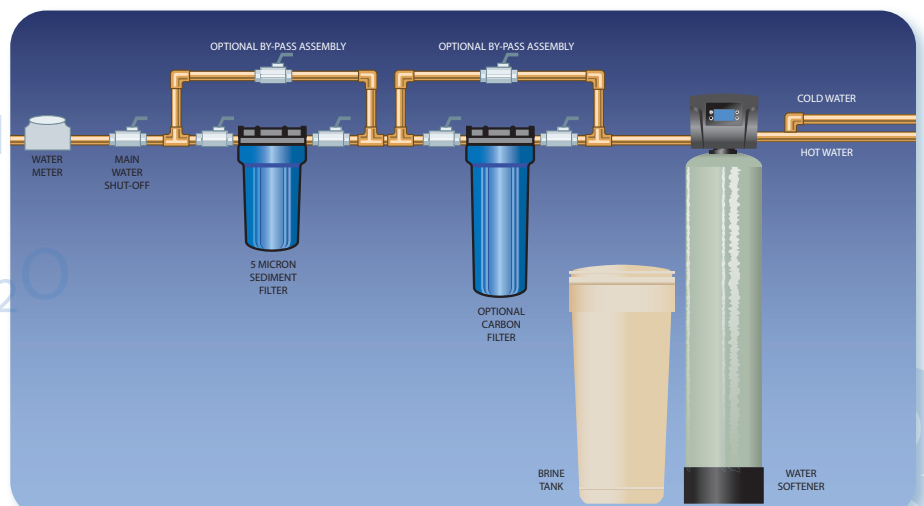

Point of Entry

All Aqua Flo Filtration products provide durable, high-quality reliable performance.

AQUA FLO®

Filter Housing Kits

Aqua Flo® Filter Housings are made to last, offering high-quality performance at economical prices. All housing kits are easy to install and come complete with a mounting bracket and hardware plus sump wrench for easy sump removal. Filter cartridges are sold separately.



FEATURES / BENEFITS:


- ◆ **Size** – Required flow rates and installation space will determine the size of the housing. Housings typically come in four sizes: 2.5" x 10", 2.5" x 20", 4.5" x 10", 4.5" x 20"
- ◆ **Material of Construction** – Reinforced Polypropylene
- ◆ **Valve-in-Head (26069 only)** – allows you to bypass or shut off the water during cartridge replacement.
- ◆ **Pressure Relief Button (Except 26069)** – relieves pressure from the housing prior to changing cartridge
- ◆ **Stainless Steel Threads (26069 only)** – reduces possibility of cross threading and allows for tighter pipe fit
- ◆ **Double O-Ring (Big Value 4.5" Housings Only)** – ensures added seal insurance protecting from leaks



Sump Wrench



Mounting Bracket and Hardware

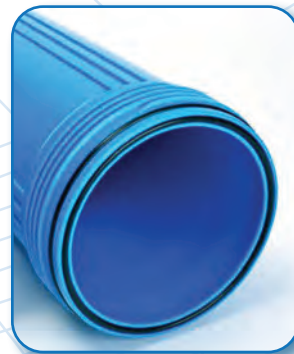

Double O-Ring Seal
(Aqua Flo Platinum BV
Housings Only)



Pressure Relief Button



Valve-in-Head



NSF/ANSI 42

4

Filter Housing Kits

- ◆ **Max. Water Temperature:** 40°C (100°F)
- ◆ **Min. Water Temperature:** 2°C (35°F)
- ◆ **Max. Water Pressure:** 100 psi (689 kPa)
- ◆ **Materials of Construction:** Reinforced Polypropylene (cap and blue sump)
- ◆ **Housing O-Ring:** EPDM
- ◆ **Pressure Relief Button:** Nylon (Except 26069)
- ◆ **Limited One Year Warranty**



P-H-PR-20BV



P-H-PR-20



P-H-PR-10BV



P-H-PR-10



WVIH34SS



NSF/ANSI 42

SPECIFICATIONS & PERFORMANCE:

| ITEM # | MODEL DESCRIPTION | FEATURES | FILTER SIZE (IN) | INLET/OUTLET SIZE NPT (IN) | COLOR | DIMENSIONS (WIDTH) X (HEIGHT) (IN) | WEIGHT (LBS) | REPLACEMENT ORING | WRENCH | CERTIFICATION* |
|--------|--------------------------|---|------------------|----------------------------|--------------|------------------------------------|--------------|-------------------|--------|----------------|
| 26069 | HOUSING, WVIH34SS | VALVE-IN-HEAD, SS THREAD NO PRESSURE RELIEF | 2.5" x 10" | 3/4" | All Blue | 5 x 13.5 (127mm x 343mm) | 4 | 92060 | 26007 | NR |
| 36051 | HOUSING, P-H-PR-10-3/4 | PRESSURE RELIEF, SINGLE (1) O-RING | 2.5" x 10" | 3/4" | Blue / Black | 5 X 12 (127mm x 305mm) | 4 | 60010681 x 1 | 93016 | NSF/ANSI 42 |
| 36273 | HOUSING, P-H-PR-20-3/4 | PRESSURE RELIEF, SINGLE (1) O-RING | 2.5" x 20" | 3/4" | Blue / Black | 5 X 23 (127mm x 584mm) | 7 | 60010560 x 1 | 93018 | NSF/ANSI 42 |
| 36117 | HOUSING, P-H-PR-10BV-3/4 | PRESSURE RELIEF, DOUBLE (2) O-RING | 4.5" x 10" | 3/4" | Blue / Black | 5 X 12 (127mm x 305mm) | 6 | 60010559 x 2 | 93017 | NSF/ANSI 42 |
| 36053 | HOUSING, P-H-PR-10BV-1 | PRESSURE RELIEF, DOUBLE (2) O-RING | 4.5" x 10" | 1" | Blue / Black | 7 X 14 (178mm x 356mm) | 6 | 60010559 x 2 | 93017 | NSF/ANSI 42 |
| 36112 | HOUSING, P-H-PR-20BV-1 | PRESSURE RELIEF, DOUBLE (2) O-RING | 4.5" x 20" | 1" | Blue / Black | 7 x 25 (178mm x 635mm) | 8 | 60010559 x 2 | 93017 | NSF/ANSI 42 |
| 36114 | HOUSING, P-H-PR-20BV-15 | PRESSURE RELIEF, DOUBLE (2) O-RING | 4.5" x 20" | 1.5" | Blue / Black | 7 x 25 (178mm x 635mm) | 8 | 60010559 x 2 | 93017 | NR |
| 36116 | HOUSING, P-H-PR-20BV-3/4 | PRESSURE RELIEF, DOUBLE (2) O-RING | 4.5" x 20" | 3/4" | Blue / Black | 7 x 25 (178mm x 635mm) | 8 | 60010559 x 2 | 93017 | NSF/ANSI 42 |

* NSF/ANSI 42 Certified for materials and structural integrity requirements only.

WARNING: Do not use on drinking water supplies that are microbiologically unsafe or of unknown quality without first adequately disinfecting the water. Protect against freezing to prevent cracking of the filter and water leakage.


NOTE: All dimensions and micron ratings are nominal. The manufacturer reserves the right to make product improvements which may deviate from the specifications and descriptions stated herein, without obligation to change previously manufactured products or to note the change. Do not subject to freezing temperatures.

Filter Cartridges

There is an overwhelming selection of cartridges to choose from. We offer a range of popular cartridges to cover most water quality needs. Your Professional Water Specialist can help determine the correct filtration products for your needs.

What is a Micron Rating?

A micron rating is also common for most cartridges. One micron is equivalent to 0.000039 inches (the diameter of a human hair is 50 to 70 microns). Choosing the right micron rating is a balance between performance and cartridge life. If you chose a smaller micron rating and the cartridge is loading up too fast then a higher micron rated cartridge may provide a better balance.

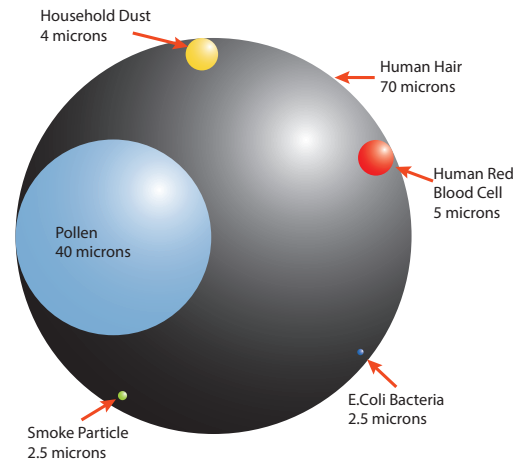

P-CB SERIES Carbon Block Filter Cartridges

AQUA FLO
PLATINUM

Aqua Flo P-CB Series Cartridges are suitable for high capacity chlorine, bad taste and odor reduction.

Aqua Flo P-CB Series Cartridges are an ideal choice for a wide range of residential, food service, commercial and industrial applications. They also make excellent polishing filters or pre-filters in applications requiring fine filtration and high capacity.



FEATURES / BENEFITS:

- ◆ Premium high capacity bad taste and odor, and chlorine taste & odor reduction
- ◆ High dirt-holding tolerance
- ◆ High porosity maximizes utilization of the carbon block
- ◆ Available in four sizes: 2.5x10"; 2.5x20"; 4.5x10"; 4.5x20"
- ◆ Universal fit – Fits most standard water filter housings
- ◆ Available in three micron ratings: 0.5; 5; 10

SPECIFICATIONS:

- ◆ End Caps – Polypropylene
- ◆ Gasket – SBC Rubber
- ◆ Filter Media – Acid Washed Activated Carbon (Coconut Shell Based)
- ◆ Netting – Polypropylene
- ◆ Outer Wrap – Polypropylene
- ◆ Temperature Rating – 40 - 125°F (4 -52°C)


APPLICATIONS (For water filtration only):

- ◆ Commercial/Residential Drinking Water Filtration
- ◆ Food & Beverage Filtration
- ◆ Industrial Water Filtration
- ◆ Chlorine reduction for process water



Filter Cartridges

P-CB SERIES Carbon Block Filter Cartridges



SPECIFICATIONS & PERFORMANCE:

| ITEM # | DESCRIPTION | DIMENSIONS | CASE QTY | SHIP WEIGHT EACH (LBS) | RATING (NOMINAL) | FLOW RATE (GPM) | CAPACITY |
|--------|---------------|--------------------------------|----------|------------------------|------------------|--------------------------|-------------------------------|
| 36002 | P-CB-0.5-10 | 2.5" x 10" (63.5 x 254 mm) | 20 | 0.8 | 0.5 | 1.0 US GPM (3.8 LPM) | 20,000 Gallons (75,700L) |
| 36023 | P-CB-5-10 | 2.5" x 10" (63.5 x 254 mm) | 20 | 0.8 | 5 | 1.0 US GPM (3.8 LPM) | 17,000 Gallons (64,350L) |
| 36012 | P-CB-10-10 | 2.5" x 10" (63.5 x 254 mm) | 20 | 0.6 | 10 | 1.0 US GPM (3.8 LPM) | 15,000 Gallons (56,780L) |
| 36005 | P-CB-0.5-20 | 2.5" x 20" (63.5 x 508 mm) | 12 | 1.8 | 0.5 | 2.0 US GPM (7.5 LPM) | 45,000 Gallons (170,340L) |
| 36027 | P-CB-5-20 | 2.5" x 20" (63.5 x 508 mm) | 12 | 1.4 | 5 | 2.0 US GPM (7.5 LPM) | 37,000 Gallons (140,060L) |
| 36017 | P-CB-10-20 | 2.5" x 20" (63.5 x 508 mm) | 12 | 1.6 | 10 | 2.0 US GPM (7.5 LPM) | 35,000 Gallons (132,490L) |
| 36001 | P-CB-0.5-10BV | 4.5" x 10" (114.3 x 254 mm) | 12 | 3.4 | 0.5 | 3.0 US GPM (11.4 LPM) | 70,000 Gallons (264,980L) |
| 36025 | P-CB-5-10BV | 4.5" x 10" (114.3 x 254 mm) | 12 | 2.6 | 5 | 3.0 US GPM (11.4 LPM) | 60,000 Gallons (227,120L) |
| 36015 | P-CB-10-10BV | 4.5" x 10" (114.3 x 254 mm) | 12 | 2.4 | 10 | 3.0 US GPM (11.4 LPM) | 52,000 Gallons (196,840L) |
| 36008 | P-CB-0.5-20BV | 4.5" x 20" (114.3 x 508 mm) | 6 | 3.8 | 0.5 | 6.0 US GPM (22.7 LPM) | 150,000 Gallons (567,810L) |
| 36029 | P-CB-5-20BV | 4.5" x 20" (114.3 x 508 mm) | 6 | 4.6 | 5 | 6.0 US GPM (22.7 LPM) | 120,000 Gallons (454,250L) |
| 36020 | P-CB-10-20BV | 4.5" x 20" (114.3 x 508 mm) | 6 | 4.4 | 10 | 6.0 US GPM (22.7 LPM) | 100,000 Gallons (378,540L) |

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

NOTE: Initial flow pressure drop less than 5 psi at rated flow rate. Change filter when pressure drop exceeds 10 psi.

Filter Cartridges

AQUA FLO[®]
PLATINUM

P-LR-1-10

Lead & Chemical Reduction Filter Cartridge

The **Aqua Flo P-LR-1-10 Cartridge** is an ultra-high performance activated carbon filter designed to reduce Lead, Volatile Organic Compounds (VOC), Trihalomethanes (THM), and chlorine from potable water. It is also highly effective in improving water taste and odor.

The cartridge is made from high quality activated carbon constructed in a proprietary compact style to deliver high adsorption performance and excellent contaminant removal characteristics.

P-LR-1-10 cartridge is an ideal choice for a wide range of residential, food service, institutional, and commercial applications.



FEATURES / BENEFITS:

- ◆ Made of premium quality activated carbon with proprietary media
- ◆ Block construction maximizes performance
- ◆ Highly effective (> 95%) in reduction of Lead VOC and chlorine, taste/ odor up to 600 US Gal (2,271 litres)
- ◆ 1µ particulate reduction
- ◆ Universal fit – can be used with most standard 10” filter housings

SPECIFICATIONS:

- ◆ End Caps – Polyethylene
- ◆ Filter Media – Acid Washed Activated Carbon (Coconut Shell Based)
- ◆ Temperature Rating – 39 - 122F (4- 50C)

APPLICATIONS (For water filtration only):

- ◆ Commercial/Residential Drinking Water Filtration
- ◆ Food & Beverage Filtration
- ◆ Industrial Water Filtration
- ◆ Lead & chemical reduction for process water



P-LR has been tested and certified by CSA Group to NSF/ANSI 53 for reduction of Lead, VOC, and to NSF/ANSI 42 for reduction of chlorine, taste and odor.

Certified for use with Aqua Flo model 36999*.

*CSA certification does not extend for use with other housings & systems.



Filter Cartridges

P-LR-1-10

Lead Removal Filter Cartridge

SPECIFICATIONS & PERFORMANCE:

| ITEM# | MODEL | MICRON RATING | LENGTH (INCH) | O.D (INCH) | I.D (INCH) | END TYPE | RATED FLOW | RATED LIFE | MAX. OPERATING TEMP |
|-------|-----------|---------------|---------------|------------|------------|-----------------|-------------|-------------------|---------------------|
| 36209 | P-LR-1-10 | 1 μ | 9.75" | 2.65" | 1" | Single Open End | 0.75 US GPM | 600 gal (2,271 L) | 100°F (~38°C) |

NOTE: Micron rating and dimensions are nominal

Filter Cartridges

CGAC SERIES Granular Activated Carbon Cartridges

Aqua Flo CGAC Series Cartridges effectively reduce unwanted tastes and odors, including chlorine taste & odor from your drinking water. They are designed to allow maximum contact between the water and carbon, ensuring optimal drinking water filtration.



FEATURES / BENEFITS:

- ◆ Effective reduction of bad taste & odor and chlorine & odor reduction
- ◆ Designed for optimal adsorption
- ◆ Post-filter to reduce carbon fines
- ◆ Available in Four Sizes: 2.5x10"; 2.5x20"; 4.5x10"; 4.5x20"
- ◆ Universal fit – Fits most standard water filter housing
- ◆ Micron – not rated

AQUA FLO®

APPLICATIONS (For water filtration only):

- ◆ Commercial/Residential Drinking Water Filtration
- ◆ Food & Beverage Filtration
- ◆ Industrial Water Filtration
- ◆ Chlorine reduction for process water

SPECIFICATIONS:

- ◆ End Caps – Polypropylene
- ◆ Gasket – SBC Rubber
- ◆ Filter Media – Granular Activated Carbon
- ◆ Outer Casing – Polypropylene
- ◆ Post Filter – Polypropylene
- ◆ Temperature Rating – 40 - 125°F (4 - 52°C)



SPECIFICATIONS & PERFORMANCE:

| ITEM # | DESCRIPTION | DIMENSIONS | CASE QTY | SHIP WEIGHT EACH (LBS) | RATING (NOMINAL) | FLOW RATE (GPM) |
|--------|-------------|--------------------------------|----------|------------------------|------------------|--------------------------|
| 26277 | CGAC-10 | 2.5" x 10" (63.5 x 254 mm) | 20 | 1.0 | NR | 1.0 US GPM (3.8 LPM) |
| 26186 | CGAC-20 | 2.5" x 20" (63.5 x 508 mm) | 12 | 2.0 | NR | 2.0 US GPM (7.5 LPM) |
| 26187 | CGAC-10BV | 4.5" x 10" (114.3 x 254 mm) | 12 | 1.9 | NR | 2.0 US GPM (7.5 LPM) |
| 26188 | CGAC-20BV | 4.5" x 20" (114.3 x 508 mm) | 6 | 3.8 | NR | 4.0 US GPM (15.1 LPM) |

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

NOTE: Initial flow pressure drop less than 5 psi at rated flow rate. Change filter when pressure drop exceeds 10 psi.

Filter Cartridges

AQUA FLO[®]
PLATINUM

P-RF SERIES

Radial Flow Granular Activated Carbon Filter Cartridges


Aqua Flo P-RF Series Cartridges are the solution for effective reduction of chlorine, bad taste and odor. These filters provide lower pressure drop and fewer carbon fines compared to similar sized standard granular activated carbon filters.

FEATURES / BENEFITS:

- ◆ Provides effective chlorine taste & odor reduction
- ◆ Ideal for POE (whole house) and other high flow rate applications
- ◆ High porosity maximizes utilization of the carbon block
- ◆ Unique design reduces carbon fines
- ◆ Very low pressure drop
- ◆ Available in two sizes: 4.5x10"; 4.5x20"
- ◆ Universal fit – Fits most standard water filter housings

SPECIFICATIONS:

- ◆ End Caps – Polypropylene
- ◆ Filter Media – Granular Activated Coal Based Carbon
- ◆ Outer Shell – Polypropylene
- ◆ Gaskets – Buna-N
- ◆ Core – Polypropylene
- ◆ Temperature Rating – 40 - 125°F (4 - 52°C)



APPLICATIONS (For water filtration only):

- ◆ Commercial/Residential Drinking Water Filtration
- ◆ Food & Beverage Filtration
- ◆ Industrial Water Filtration
- ◆ Chlorine reduction for process water



SPECIFICATIONS & PERFORMANCE:

| ITEM # | DESCRIPTION | DIMENSIONS | CASE QTY | SHIP WEIGHT EACH (LBS) | RATING (NOMINAL) | FLOW RATE (GPM) |
|--------|-------------|--------------------------------|----------|------------------------|------------------|------------------------|
| 36089 | P-RF-10BV | 4.5" x 10" (114.3 x 254 mm) | 9 | 2.0 | NR | 3.0 US GPM (11 LPM) |
| 36091 | P-RF-20BV | 4.5" x 20" (114.3 x 508 mm) | 9 | 3.8 | NR | 6.0 US GPM (23 LPM) |

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

NOTE: Initial flow pressure drop less than 5 psi at rated flow rate. Change filter when pressure drop exceeds 10 psi.

Filter Cartridges

AQUA FLO[®]
PLATINUM

P-ICC SERIES

Impregnated Carbon Cellulose Cartridge

The Aqua Flo ICC cartridge filter has a dual benefit for sediment filtration and reduction of chlorine and bad taste and odor from drinking water.

These carbon wrap sediment cartridges consist of polypropylene melt blown core with carbon impregnated outer layer wrap. It is an economical solution for general water filtration requirements. This filter has high dirt-loading capacity and is recommended for chlorinated water supplies.

These dual-purpose cartridges are well suited for residential applications, and are great polishing filters for closed-loop water stream systems. The netting and reinforced support provide strength to the filter.



FEATURES / BENEFITS:


- ◆ Provides sediment filtration as well as taste/odor/chlorine reduction
- ◆ High dirt loading capacity
- ◆ External netting for additional strength
- ◆ Available in 2.5"x10"
- ◆ Universal fit – Fits most standard water filter housings
- ◆ Micron Rating – 5

APPLICATIONS (For water filtration only):

- ◆ Commercial/Residential Drinking Water Filtration
- ◆ RO Pre-filtration
- ◆ Food & Beverage Filtration
- ◆ Industrial Water Filtration

SPECIFICATIONS:

- ◆ Filter Media – Carbon Impregnated Cellulose
- ◆ End Caps – Polypropylene
- ◆ Gaskets – PVC Plastisol
- ◆ Core – Polypropylene
- ◆ Temperature Rating – 39 - 180°F (4 - 82°C)



SPECIFICATIONS & PERFORMANCE:

| ITEM # | DESCRIPTION | DIMENSIONS | CASE QTY | SHIP WEIGHT EACH (LBS) | RATING (NOMINAL) | FLOW RATE (GPM) | CAPACITY |
|--------|-------------|-------------------------------|----------|------------------------|------------------|-----------------------|------------------------|
| 36062 | P-ICC-5-10 | 2.5" x 10" (63.5 x 254 mm) | 48 | 0.4 | 5 | 2 US GPM (7.5 LPM) | 1,000 GAL (3,780 L) |

NOTES: Increased flow rates may result in less effective chlorine reduction. Some harmless bacteria will attack cellulose media cartridges. If your cartridge seems to disintegrate or has a musty or moldy odor, switch to a synthetic media cartridge or consult the manufacturer. Estimated capacity tested at given flow rate using 2 ppm free available chlorine to 0.5 ppm breakthrough.

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

NOTE: Initial flow pressure drop less than 5 psi at rated flow rate. Change filter when pressure drop exceeds 10 psi.

Filter Cartridges


AQUA FLO[®]
PLATINUM

P-PMB SERIES

Polypropylene Melt Blown Filter Cartridges

The Aqua Flo P-PMB cartridge filters are made by thermally bonding polypropylene microfibers for higher filtration efficiency performance.

The polypropylene material is chemical resistant and not prone to bacterial attack. They will also not add any taste, color and odor to the water. They are available in wide variety of sizes and micron ratings.

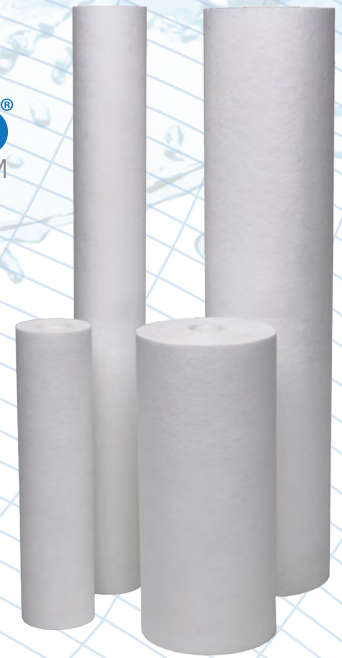

FEATURES / BENEFITS:


- ◆ Constructed from high quality polypropylene filter media for higher filtration efficiency
- ◆ Thermally bonded micro-fiber construction for high strength
- ◆ Designed for purity and chemical compatibility
- ◆ Available in four sizes: 2.5x10"; 2.5x20"; 4.5x10"; 4.5x20"
- ◆ Universal fit – Fits most standard water filter housings
- ◆ Available in four micron ratings: 1; 5; 20; 50

SPECIFICATIONS:

- ◆ Filter Media – Polypropylene
- ◆ Temperature Rating – 39 - 122°F (4 -50°C)

APPLICATIONS (For water filtration only):

- ◆ Commercial/Residential Drinking Water Filtration
- ◆ RO Pre-filtration
- ◆ Cooling Tower Filtration
- ◆ Chill Water Loop Filtration
- ◆ Food & Beverage Filtration
- ◆ Industrial Water Filtration



13

Filter Cartridges

P-PMB SERIES

Polypropylene Melt Blown Filter Cartridges

SPECIFICATIONS & PERFORMANCE:

| ITEM # | DESCRIPTION | DIMENSIONS | CASE QTY | SHIP WEIGHT EACH (LBS) | RATING (NOMINAL) | FLOW RATE (GPM) |
|--------|---------------|--------------------------------|----------|------------------------|------------------|--------------------------|
| 36249 | P-PMB-1-10 | 2.5" x 10" (63.5 x 254 mm) | 50 | 0.2 | 1 | 2 US GPM (7.5 LPM) |
| 36198 | P-PMB-5-10 | 2.5" x 10" (63.5 x 254 mm) | 50 | 0.2 | 5 | 3.0 US GPM (11.4 LPM) |
| 36197 | P-PMB-20-10 | 2.5" x 10" (63.5 x 254 mm) | 50 | 0.2 | 20 | 5 US GPM (19 LPM) |
| 36250 | P-PMB-50-10 | 2.5" x 10" (63.5 x 254 mm) | 50 | 0.2 | 50 | 8 US GPM (30.3 Lpm) |
| 36202 | P-PMB-1-20 | 2.5" x 20" (63.5 x 508 mm) | 25 | 0.6 | 1 | 4.0 US GPM (15.1 LPM) |
| 36203 | P-PMB-5-20 | 2.5" x 20" (63.5 x 508 mm) | 25 | 0.6 | 5 | 7 US GPM (26.5 LPM) |
| 36206 | P-PMB-20-20 | 2.5" x 20" (63.5 x 508 mm) | 25 | 0.6 | 20 | 11 US GPM (42 LPM) |
| 36251 | P-PMB-50-20 | 2.5" x 20" (63.5 x 508 mm) | 25 | 0.6 | 50 | 16 US GPM (60.6 LPM) |
| 36280 | P-PMB-1-10BV | 4.5" x 10" (114.3 x 254 mm) | 20 | 0.8 | 1 | 6.0 US GPM (22.7 LPM) |
| 36281 | P-PMB-5-10BV | 4.5" x 10" (114.3 x 254 mm) | 20 | 0.8 | 5 | 10 US GPM (38 LPM) |
| 36282 | P-PMB-20-10BV | 4.5" x 10" (114.3 x 254 mm) | 20 | 0.8 | 20 | 14 US GPM (52.9 LPM) |
| 36283 | P-PMB-50-10BV | 4.5" x 10" (114.3 x 254 mm) | 20 | 0.8 | 50 | 20 US GPM (75.7 LPM) |
| 36286 | P-PMB-1-20BV | 4.5" x 20" (114.3 x 508 mm) | 10 | 1.8 | 1 | 12 GPM (45.4 LPM) |
| 36287 | P-PMB-5-20BV | 4.5" x 20" (114.3 x 508 mm) | 10 | 1.8 | 5 | 20 US GPM (75.7 LPM) |
| 36288 | P-PMB-20-20BV | 4.5" x 20" (114.3 x 508 mm) | 10 | 1.8 | 20 | 20 US GPM (75.7 LPM) |
| 36289 | P-PMB-50-20BV | 4.5" x 20" (114.3 x 508 mm) | 10 | 1.8 | 50 | 20 US GPM (75.7 LPM) |

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

NOTE: Initial flow pressure drop less than 5 psi at rated flow rate. Change filter when pressure drop exceeds 10 psi.

Filter Cartridges

AQUA FLO[®]
PLATINUM

P-SW SERIES String Wound Filter Cartridges

The Aqua Flo P-SW cartridge filters are manufactured from polypropylene cord which is wound around the polypropylene core.

These cartridge filters are an economical solution for reduction of sediment, sand, rust and scale particles from the drinking water.



FEATURES / BENEFITS:

- ◆ String wound filters reduces sediment from a variety of liquids
- ◆ Low pressure drop
- ◆ Withstands high temperatures
- ◆ Wide chemical compatibility
- ◆ Available in four sizes: 2.5x10"; 2.5x20"; 4.5x10"; 4.5x20"
- ◆ Universal fit – Fits most standard water filter housings
- ◆ Available in four micron ratings: 1; 5; 20; 50

SPECIFICATIONS:

- ◆ Filter Media – Polypropylene
- ◆ Core – Polypropylene
- ◆ Temperature Rating – 40 - 140°F (4 -60°C)

APPLICATIONS (For water filtration only):

- ◆ Commercial/Residential Drinking Water Filtration
- ◆ RO Pre-filtration
- ◆ Cooling Tower Filtration
- ◆ Chill Water Loop Filtration
- ◆ Food & Beverage Filtration
- ◆ Industrial Water Filtration



This String Wound Filter is Tested and Certified by NSF International against NSF/ANSI Standard 42 for material and structural integrity requirements.

COMPONENT

15

Filter Cartridges

P-SW SERIES String Wound Filter Cartridges

SPECIFICATIONS & PERFORMANCE:

| ITEM # | DESCRIPTION | DIMENSIONS | CASE QTY | SHIP WEIGHT EACH (LBS) | RATING (NOMINAL) | FLOW RATE (GPM) |
|--------|--------------|--------------------------------|----------|------------------------|------------------|--------------------------|
| 36159 | P-SW-1-10 | 2.5" x 10" (63.5 x 254 mm) | 50 | 0.4 | 1 | 5 US GPM (19 LPM) |
| 36109 | P-SW-5-10 | 2.5" x 10" (63.5 x 254 mm) | 50 | 0.4 | 5 | 8 US GPM (30.3 Lpm) |
| 36160 | P-SW-20-10 | 2.5" x 10" (63.5 x 254 mm) | 50 | 0.4 | 20 | 16 US GPM (60.6 LPM) |
| 36102 | P-SW-50-10 | 2.5" x 10" (63.5 x 254 mm) | 50 | 0.8 | 50 | 20 US GPM (75.7 LPM) |
| 36169 | P-SW-1-20 | 2.5" x 20" (63.5 x 508 mm) | 25 | 0.6 | 1 | 10 US GPM (38 LPM) |
| 36161 | P-SW-5-20 | 2.5" x 20" (63.5 x 508 mm) | 25 | 0.8 | 5 | 16 US GPM (60.6 LPM) |
| 36162 | P-SW-20-20 | 2.5" x 20" (63.5 x 508 mm) | 25 | 0.8 | 20 | 30 US GPM (113.4 LPM) |
| 36163 | P-SW-50-20 | 2.5" x 20" (63.5 x 508 mm) | 25 | 0.8 | 50 | 30 US GPM (113.4 LPM) |
| 36164 | P-SW-1-10BV | 4.5" x 10" (114.3 x 254 mm) | 20 | 1.4 | 1 | 10 US GPM (38 LPM) |
| 36138 | P-SW-5-10BV | 4.5" x 10" (114.3 x 254 mm) | 20 | 1.4 | 5 | 20 US GPM (75.7 LPM) |
| 36165 | P-SW-20-10BV | 4.5" x 10" (114.3 x 254 mm) | 20 | 1.4 | 20 | 20 US GPM (75.7 LPM) |
| 36166 | P-SW-50-10BV | 4.5" x 10" (114.3 x 254 mm) | 20 | 1.4 | 50 | 20 US GPM (75.7 LPM) |
| 36141 | P-SW-1-20BV | 4.5" x 20" (114.3 x 508 mm) | 10 | 2.8 | 1 | 30 US GPM (113.4 LPM) |
| 36142 | P-SW-5-20BV | 4.5" x 20" (114.3 x 508 mm) | 10 | 2.8 | 5 | 30 US GPM (113.4 LPM) |
| 36167 | P-SW-20-20BV | 4.5" x 20" (114.3 x 508 mm) | 10 | 2.8 | 20 | 30 US GPM (113.4 LPM) |
| 36168 | P-SW-50-20BV | 4.5" x 20" (114.3 x 508 mm) | 10 | 2.8 | 50 | 30 US GPM (113.4 LPM) |

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

NOTE: Initial flow pressure drop less than 5 psi at rated flow rate. Change filter when pressure drop exceeds 10 psi.

Filter Cartridges

AQUA FLO®

PPC SERIES

Pleated Polyester Reusable Filter Cartridges

The Aqua Flo PPC cartridge filters are made from reusable polyester fibers which are pleated to maximize dirt holding capacity. These are excellent multi-purpose sediment filters.

FEATURES / BENEFITS:


- ◆ Pleated design maximizes filtration area for lower initial pressure drop
- ◆ Durable, versatile and reusable
- ◆ Polyester media is bacteria and chemical resistant
- ◆ Available in four sizes: 2.5x10"; 2.5x20"; 4.5x10"; 4.5x20"
- ◆ Universal fit – Fits most standard water filter housings
- ◆ Available in four micron ratings: 1; 5; 30; 50

SPECIFICATIONS:

- ◆ Filter Media – Non-Woven Polyester
- ◆ End Caps – Vinyl Plastisol
- ◆ Core – Polypropylene
- ◆ Temperature Rating – 39 - 125°F (4 -52°C)

APPLICATIONS (For water filtration only):

- ◆ Commercial/Residential Drinking Water Filtration
- ◆ RO Pre-filtration
- ◆ Cooling Tower Filtration
- ◆ Chill Water Loop Filtration
- ◆ Food & Beverage Filtration
- ◆ Industrial Water Filtration

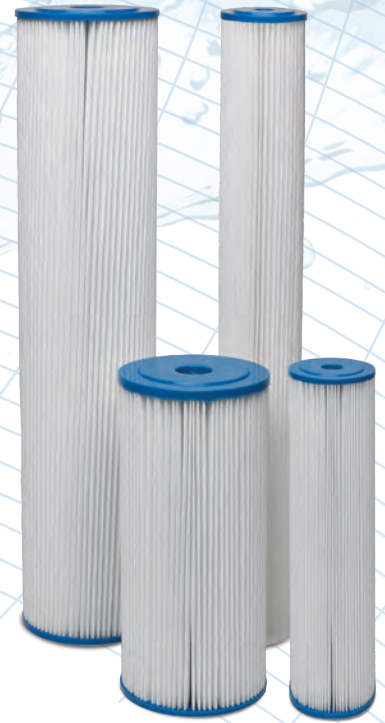

Filter Cartridges

PPC SERIES

Pleated Polyester Reusable Filter Cartridges

SPECIFICATIONS & PERFORMANCE:

| ITEM # | DESCRIPTION | DIMENSIONS | CASE QTY | SHIP WEIGHT EACH (LBS) | RATING (NOMINAL) | FLOW RATE (GPM) |
|--------|-------------|--------------------------------|----------|------------------------|------------------|--------------------------|
| 26174 | PPC-1-10 | 2.5" x 10" (63.5 x 254 mm) | 50 | 0.25 | 1 | 7 US GPM (26.5 LPM) |
| 26175 | PPC-5-10 | 2.5" x 10" (63.5 x 254 mm) | 50 | 0.25 | 5 | 7 US GPM (26.5 LPM) |
| 26162 | PPC-30-10 | 2.5" x 10" (63.5 x 254 mm) | 50 | 0.2 | 30 | 7 US GPM (26.5 LPM) |
| 26163 | PPC-50-10 | 2.5" x 10" (63.5 x 254 mm) | 50 | 0.2 | 50 | 7 US GPM (26.5 LPM) |
| 26176 | PPC-1-20 | 2.5" x 20" (63.5 x 508 mm) | 25 | 0.7 | 1 | 14 US GPM (52.9 LPM) |
| 26177 | PPC-5-20 | 2.5" x 20" (63.5 x 508 mm) | 25 | 0.7 | 5 | 14 US GPM (52.9 LPM) |
| 26160 | PPC-30-20 | 2.5" x 20" (63.5 x 508 mm) | 25 | 0.7 | 30 | 14 US GPM (52.9 LPM) |
| 26178 | PPC-5-10BV | 4.5" x 10" (114.3 x 254 mm) | 20 | 0.6 | 5 | 15 US GPM (56.7 LPM) |
| 26242 | PPC-30-10BV | 4.5" x 10" (114.3 x 254 mm) | 20 | 0.5 | 30 | 15 US GPM (56.7 LPM) |
| 26243 | PPC-50-10BV | 4.5" x 10" (114.3 x 254 mm) | 20 | 0.5 | 50 | 15 US GPM (56.7 LPM) |
| 26168 | PPC-1-20BV | 4.5" x 20" (114.3 x 508 mm) | 10 | 0.86 | 1 | 30 US GPM (113.4 LPM) |
| 26180 | PPC-5-20BV | 4.5" x 20" (114.3 x 508 mm) | 10 | 0.86 | 5 | 30 US GPM (113.4 LPM) |
| 26244 | PPC-30-20BV | 4.5" x 20" (114.3 x 508 mm) | 10 | 0.75 | 30 | 30 US GPM (113.4 LPM) |
| 26169 | PPC-50-20BV | 4.5" x 20" (114.3 x 508 mm) | 10 | 0.75 | 50 | 30 US GPM (113.4 LPM) |

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

NOTE: Initial flow pressure drop less than 5 psi at rated flow rate. Change filter when pressure drop exceeds 10 psi.


Filter Cartridges

AQUA FLO®

PC SERIES

Pleated Cellulose Filter Cartridges

The Aqua Flo PC cartridge filters are made from pleated cellulose media and are recommended for general water filtration requirements.

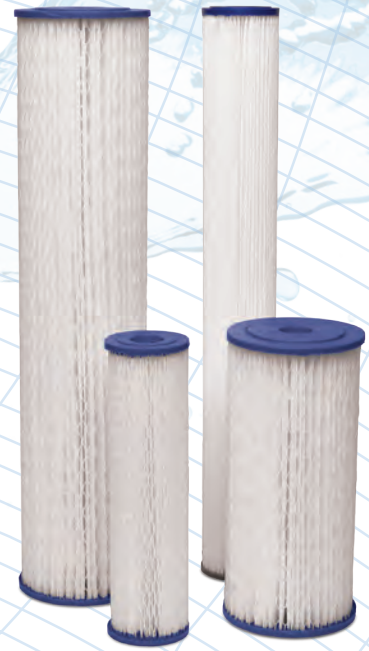

FEATURES / BENEFITS:

- ◆ Pleated design maximizes filtration area for lower initial pressure drop
- ◆ Designed for general water filtration purposes
- ◆ Cellulose based material
- ◆ Available in four sizes: 2.5x10"; 2.5x20"; 4.5x10"; 4.5x20"
- ◆ Universal fit – Fits most standard water filter housings
- ◆ Available in 20 micron

APPLICATIONS (For water filtration only):

- ◆ Commercial/Residential Drinking Water Filtration
- ◆ RO Pre-filtration
- ◆ Cooling Tower Filtration
- ◆ Chill Water Loop Filtration
- ◆ Food & Beverage Filtration
- ◆ Industrial Water Filtration

SPECIFICATIONS:

- ◆ End Caps – Vinyl Plastisol
- ◆ Core – Polypropylene
- ◆ Filter Media – Cellulose paper
- ◆ Temperature Rating – 40 - 145°F (4 - 63°C)



SPECIFICATIONS & PERFORMANCE:

| ITEM # | DESCRIPTION | DIMENSIONS | CASE QTY | SHIP WEIGHT EACH (LBS) | RATING (NOMINAL) | FLOW RATE (GPM) |
|--------|-------------|--------------------------------|----------|------------------------|------------------|--------------------------|
| 26276 | PC-20-10 | 2.5" x 10" (63.5 x 254 mm) | 50 | 0.2 | 20 | 7 US GPM (26.5 LPM) |
| 26182 | PC-20-20 | 2.5" x 20" (63.5 x 508 mm) | 25 | 0.4 | 20 | 14 US GPM (52.9 LPM) |
| 26183 | PC-20-10BV | 4.5" x 10" (114.3 x 254 mm) | 20 | 0.6 | 20 | 15 US GPM (56.7 LPM) |
| 26184 | PC-20-20BV | 4.5" x 20" (114.3 x 508 mm) | 10 | 1.2 | 20 | 30 US GPM (113.4 LPM) |

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

NOTE: Initial flow pressure drop less than 5 psi at rated flow rate. Change filter when pressure drop exceeds 10 psi.



Filter Cartridges



P-DG SERIES Dual Gradient Filter Cartridges


The Aqua Flo DG cartridge filters are made from 100% polypropylene. The progressively loose structure from inside to outside enhance cartridge performance in reduction of dirt, dust and other particles.

The two separate gradient layers of the filter enhance the performance such that it achieves a much higher dirt-loading capacity compared to similar size sediment cartridge filters including spun and string-wound. These filters make an ideal sediment reduction choice for a wide range of residential, food service, commercial and industrial applications.



FEATURES / BENEFITS:

- ◆ No fiber release and media migration
- ◆ Designed for purity, bacteria and chemical resistance
- ◆ Two separate gradient density layers enhance cartridge performance
- ◆ Three times the dirt-holding capacity than other traditional sediment filters
- ◆ Available in two sizes: 4.5x10"; 4.5x20"
- ◆ Universal fit – Fits most standard water filter housings
- ◆ Available in three micron ratings: 25/1; 50/5; 75/25



APPLICATIONS (For water filtration only):

- ◆ Commercial/Residential Drinking Water Filtration
- ◆ RO Pre-filtration
- ◆ Cooling Tower Filtration
- ◆ Chill Water Loop Filtration
- ◆ Food & Beverage Filtration
- ◆ Industrial Water Filtration



SPECIFICATIONS:

- ◆ Filter Material – Polypropylene
- ◆ Temperature Rating – 39 - 122°F (4 -50°C)

SPECIFICATIONS & PERFORMANCE:

| ITEM # | DESCRIPTION | DIMENSIONS | CASE QTY | SHIP WEIGHT EACH (LBS) | RATING (NOMINAL) | FLOW RATE (GPM) |
|--------|-----------------|--------------------------------|----------|------------------------|------------------|-------------------------|
| 36039 | P-DG-25-1-10BV | 4.5" x 10" (114.3 x 254 mm) | 20 | 0.8 | 25/1 | 10 US GPM (38 LPM) |
| 36043 | P-DG-50-5-10BV | 4.5" x 10" (114.3 x 254 mm) | 20 | 0.8 | 50/5 | 10 US GPM (38 LPM) |
| 36047 | P-DG-75-25-10BV | 4.5" x 10" (114.3 x 254 mm) | 20 | 0.8 | 75/25 | 10 US GPM (38 LPM) |
| 36041 | P-DG-25-1-20BV | 4.5" x 20" (114.3 x 508 mm) | 10 | 2.0 | 25/1 | 20 US GPM (75.7 LPM) |
| 36045 | P-DG-50-5-20BV | 4.5" x 20" (114.3 x 508 mm) | 10 | 2.0 | 50/5 | 20 US GPM (75.7 LPM) |
| 36049 | P-DG-75-25-20BV | 4.5" x 20" (114.3 x 508 mm) | 10 | 2.0 | 75/25 | 20 US GPM (75.7 LPM) |

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

NOTE: Initial flow pressure drop less than 5 psi at rated flow rate. Change filter when pressure drop exceeds 10 psi.

Filter Cartridges: Specialty Filters

Water Softening

These cation exchange softening cartridges utilize a bed of sodium form cation resin beads to reduce hardness and scale deposits. The convenient and space-saving design of our WS Series cartridges means that softened water can be provided easily and cost effectively at the exact point of need.

| Item # | Model # | Filter Size (In) | Capacity (grains) |
|--------|-----------|------------------|-------------------|
| 36242 | P-WS-10 | 2.5" X 10" | 1,414 |
| 36244 | P-WS-20BV | 4.5" X 20" | 6,295 |

Deionization

These high-capacity, semi-conductor grade resin cartridges are ideal for use in pharmaceuticals, medical laboratories, cosmetics, and circuit board printing applications.

| Item # | Model # | Filter Size (In) | Max Flow gpm | Max Flow lpm | ΔP @ Max Flow psi | Max Flow kPa | Capacity in Grains as CaCO3 |
|--------|-----------|------------------|-----------------|-----------------|----------------------|-----------------|--------------------------------|
| 36179 | P-DI-10 | 2.5" X 10" | 0.4 | 1.5 | <5 | <35 | 500 |
| 36180 | P-DI-20 | 2.5" X 20" | 0.8 | 3.0 | <10 | <70 | 1000 |
| 36178 | P-DI-20BB | 4.5" X 20" | 1.2 | 4.5 | <10 | <70 | 2500 |

Iron Reduction

This cartridge helps to eliminate the orange and brown stains often found in sinks, toilets, tubs and other plumbing fixtures.

| Item # | Model # | Filter Size (In) | Capacity (ppm) |
|--------|-----------|------------------|-----------------|
| 36236 | P-IR-20BV | 4.5" X 20" | 1,492 @ 3gpm |

In-line Cartridge

Sealed in-line filters feature coconut shell, granular activated carbon, and are designed to reduce unwanted taste, odor and chlorine taste and odor.

| Item # | Model # | Filter Size (In) | Micron |
|--------|-------------------|------------------|--------|
| 36248 | P-IL- CGAC-3/8 | 2" x 10 | 5 |
| 36230 | P-IL-PH-1/4 | 2" x 10 | 20 |

Ice Maker

High grade coconut shell activated carbon and a filter element for sediment removal make this the ideal choice for ice makers and water dispensers. Enjoy clean, clear, great tasting water and ice cubes.

| Item # | Model # | Filter Size (In) |
|--------|---------|------------------|
| 26003 | WIM14 | 2.25" X 8" |

Stainless Steel Housings



FEATURES

- ◆ Heavy-duty units for smaller filtration systems and point-of-use applications
- ◆ Brushed 304 stainless steel sump with a cast brass / nickel plated head
- ◆ Ideal for high-pressure / hot water applications
- ◆ Utilizes double open-end cartridges

| Materials of Construction | |
|---------------------------|-----------------------------|
| Housing | Brushed 304 Stainless Steel |
| Head | Brass / Nickel Plated |
| Max Temperature | 205°F (96°C) |
| Pipe Size | 3/4" NPT |
| Sealing Gaskets | Buna-N, Cellulose Fiber |

Housings

| Item # | Model | Maximum Dimensions | Flow Rate (gpm) | Maximum Pressure |
|--------|-----------------------------|---------------------------------------|-----------------|--------------------|
| 36146 | SS-1 | 14 1/8" x 4 1/8" (360mm x 105mm) | 10 gpm (38 lpm) | 250 psi (17.2 bar) |
| 36147 | SS-2 | 24" x 4 1/8" (610mm x 105mm) | 15 gpm (57 lpm) | 250 psi (17.2 bar) |
| 36148 | SS-3 | 33 5/8" x 4 1/8" (853mm x 105mm) | 20 gpm (76 lpm) | 250 psi (17.2 bar) |
| 36145 | Side Stream Filter Assembly | 14 1/8"(h) x 20 3/4" (w) x 4 1/8" (d) | 10 gpm (38 lpm) | 250 psi (17.2 bar) |

Maximum cartridge diameter 3" (76mm)

#36145 Side Stream Filter Assembly

Pre-Assembled SS-1 Housing with stainless steel flow indicator and brass shutoffs. Side stream filters are primarily used for filtering a portion of the water in a closed loop boiler system to protect the boiler, controls and circulating pumps. Dimensions: 14 1/8" (h) x 20 3/4" (w) x 4 1/8" (d)



Filter Cartridges

Tin Core-String Wound Cartridges

- ◆ Tin core and string wound natural cotton media is suitable for general purpose high temperature filter applications with water, oils, solvents, paints and other non-FDA (non-potable) applications.
- ◆ Maximum Cartridge Temperature - 300°F (149°C)
- ◆ 2.5" O.D. Core x 10" Length (suitable for #10 and ST-1 Housings)
- ◆ Available in 5, 10, 25, 50 micron ratings



- ◆ 2.5 O.D. Core x 10" Length (suitable for #10 and ST-1 Housings)
- ◆ Available in 5, 10, 25, 50 micron ratings

304SS Core String Wound Cartridges

- ◆ Maximum Cartridge Temperature - 300°F (149°C)
- ◆ Suitable for non-potable water only

Cartridges

| Item # | Description | Micron | Weight (LBS) |
|--------|---|--------|--------------|
| 26137 | Sediment, 10" Hot Water, Stainless Steel, Non-potable | 5 | 0.5 |
| 26138 | Sediment, 10" Hot Water, Stainless Steel, Non-potable | 10 | 0.5 |
| 26139 | Sediment, 10" Hot Water, Stainless Steel, Non-potable | 25 | 0.5 |
| 26140 | Sediment, 10" Hot Water, Stainless Steel, Non-potable | 50 | 0.5 |
| 26146 | Sediment, 20" Hot Water, Stainless Steel, Non-potable | 25 | 1.0 |
| 26147 | Sediment, 20" Hot Water, Stainless Steel, Non-potable | 50 | 1.0 |
| 26141 | Sediment, 10" Hot Water, Tin Core, Non-potable | 5 | 0.5 |
| 26134 | Sediment, 10" Hot Water, Tin Core, Non-potable | 10 | 0.5 |
| 26135 | Sediment, 10" Hot Water, Tin Core, Non-potable | 25 | 0.5 |
| 26136 | Sediment, 10" Hot Water, Tin Core, Non-potable | 50 | 0.5 |

Bag Filters

BF Series (Polypropylene Felt)

- ◆ Filtration ratings from 1 to 200 microns to comply with any filtration requirement
- ◆ Manufactured from felt due to its high solids loading capabilities versus similar mesh fabrics
- ◆ The media is created by needle-punching two layers of synthetic fibers together in a supporting scrim
- ◆ A glazed finish, created by melting the outermost surface fibers, is used to produce a bond that reduces the possibility of migration.

| Item # | Model # | Filter Size (In) | Micron |
|--------|--------------|------------------|--------|
| 36184 | P-BF-410-1 | 4" X 10" | 1 |
| 36188 | P-BF-410-5 | 4" X 10" | 5 |
| 36185 | P-BF-410-10 | 4" X 10" | 10 |
| 36187 | P-BF-410-25 | 4" X 10" | 25 |
| 36189 | P-BF-410-50 | 4" X 10" | 50 |
| 36186 | P-BF-410-100 | 4" X 10" | 100 |
| 36190 | P-BF-420-1 | 4" X 20" | 1 |
| 36195 | P-BF-420-5 | 4" X 20" | 5 |
| 36191 | P-BF-420-10 | 4" X 20" | 10 |
| 36194 | P-BF-420-25 | 4" X 20" | 25 |
| 36196 | P-BF-420-50 | 4" X 20" | 50 |
| 36192 | P-BF-420-100 | 4" X 20" | 100 |
| 36193 | P-BF-420-200 | 4" X 20" | 200 |

High-Flow Whole House Filtration System

Provides economical, high flow solutions for sediment, taste and odor removal.

FEATURES

- ◆ High-Flow Dual Filtration System
- ◆ Up to 70,000 Gallons of great tasting water
- ◆ Flow rates up to 6 gpm
- ◆ Large 20" Filters for long lasting performance
- ◆ Dimensions: 8" deep, 16 1/4" wide, 27 1/2" high
- ◆ Weight: 21 lb.s (9.5 kg.)
- ◆ Inlet/outlet pressure gauges indicate when filter replacements are required
- ◆ For municipal water supplies



160197 High-Flow Dual Stage 20BB SED, Carbon, 3/4" In/Out

160198 High-Flow Dual Stage 20BB SED, Carbon, 1" In/Out

| Item # | Model # | Size | Micron | Capacity (Gallons) | Flow Rate (gpm) |
|--------|-------------|------------|--------|-----------------------|-----------------|
| 36287 | PPMB-5-20BV | 4.5" x 20" | 5 | NA | 20 gpm |
| 36091 | RF-20BV | 4.5" x 20" | NA | 70,000 gallon @ 4 gpm | 6 gpm |

Cartridge Selection Guide

| Model # | Scale and Rust Particles | Coarse Sand | Dirt / Silt / Sand | Fine Dirt / Silt / Sand | Extra Fine Dirt / Silt / Sand | Bad Taste & Odor | Aesthetic Chlorine: Taste & Odor | Lead and VOC Removal |
|--|--------------------------|-------------|--------------------|-------------------------|-------------------------------|------------------|----------------------------------|----------------------|
| Polypropylene Melt Blown (P-PMB) Filter Cartridge | | | | | | | | |
| P-PMB-1-10 P-PMB-1-20 P-PMB-1-10BV P-PMB-1-20BV P-PMB-5-10 P-PMB-5-20 P-PMB-5-10BV P-PMB-5-20BV | ✓ | ✓ | ✓ | ✓ | ✓ | | | |
| P-PMB-20-10 P-PMB-20-20 P-PMB-20-10BV P-PMB-20-20BV | ✓ | ✓ | ✓ | | | | | |
| P-PMB-50-10 P-PMB-50-20 P-PMB-50-10BV P-PMB-50-20BV | ✓ | ✓ | | | | | | |
| String Wound (P-SW) Cartridge Filter | | | | | | | | |
| P-SW-1-10 P-SW-1-20 P-SW-1-10BV P-SW-1-20BV P-SW-5-10 P-SW-5-20 P-SW-5-10BV P-SW-5-20BV | ✓ | ✓ | ✓ | ✓ | ✓ | | | |
| P-SW-20-10 P-SW-20-20 P-SW-20-10BV P-SW-20-20BV | ✓ | ✓ | ✓ | | | | | |
| P-SW-50-10 P-SW-50-20 P-SW-50-10BV P-SW-50-20BV | ✓ | ✓ | | | | | | |
| Dual Gradient (P-DG) Density Cartridge Filter | | | | | | | | |
| P-DG-25-1-10BV P-DG-25-1-20BV P-DG-50-5-10BV P-DG-50-5-20BV | ✓ | ✓ | ✓ | ✓ | ✓ | | | |
| P-DG-75-25-10BV P-DG-75-25-20BV | ✓ | ✓ | ✓ | | | | | |

| Model # | Scale and Rust Particles | Coarse Sand | Dirt / Silt / Sand | Fine Dirt / Silt / Sand | Extra Fine Dirt / Silt / Sand | Bad Taste & Odor | Aesthetic Chlorine: Taste & Odor | Lead and VOC Removal |
|--|--------------------------|-------------|--------------------|-------------------------|-------------------------------|------------------|----------------------------------|----------------------|
| Pleated Polyester Cartridge (PPC) Resuable Filter | | | | | | | | |
| PPC-1-10 PPC-1-20 PPC-1-20BV PPC-5-10 PPC-5-20 PPC-5-10BV PPC-5-20BV | ✓ | ✓ | ✓ | ✓ | ✓ | | | |
| PPC-30-10 PPC-30-20 PPC-30-10BV PPC-30-20BV PPC-50-10 PPC-50-10BV PPC-50-20BV | ✓ | ✓ | | | | | | |
| Pleated Cellulose (PC) Cartridge Filter | | | | | | | | |
| PC-20-10 PC-20-20 PC-20-10BV PC-20-20BV | ✓ | ✓ | ✓ | | | | | |
| Carbon Block (P-CB) Cartridge Filter | | | | | | | | |
| P-CB-0.5-10 P-CB-0.5-20 P-CB-0.5-10BV P-CB-0.5-20BV P-CB-5-10 P-CB-5-20 P-CB-5-10BV P-CB-5-20BV | | | | | | ✓ | ✓ | |
| P-CB-10-10 P-CB-10-20 P-CB-10-10BV P-CB-10-20BV | | | | | | ✓ | ✓ | |
| Lead Removal (P-LR-1-10) Cartridge Filter | | | | | | | | |
| P-LR-1-10 | | | | | | ✓ | ✓ | ✓ |
| Radial Flow (P-RF) Granular Activated Carbon Cartridge Filter | | | | | | | | |
| P-RF-10BV P-RF-20BV | | | | | | ✓ | ✓ | |
| Impregnated Carbon Cellulose (P-ICC) Dual Purpose Filter | | | | | | | | |
| P-ICC-5-10 | | | | | | ✓ | ✓ | |
| Granular Activated Carbon (CGAC) Cartridge Filter | | | | | | | | |
| CGAC-10 CGAC-20 CGAC-10BV CGAC-20BV | | | | | | ✓ | ✓ | |

Authorized Distributor